


# POLYMER WATERPROOF TRAFFIC COATING

SEMCO Satin Stone over concrete

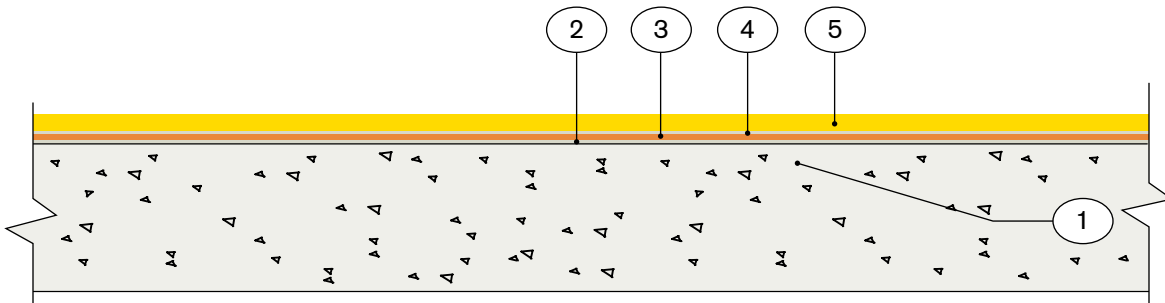

- 1. Existing substrate
- 2. X-Bond Scratch Coat
- 3. SEMCO Liquid Membrane™ - 2 coats, 20 mil per coat, 40 mil total
- 4. X-Bond Scratch Coat
- 5. SEMCO Satin Stone (optional additions of integral color and/or non-skid additive for ADA Compliance)


**PREPARATION - TYPE C**  
SEMCO Commercial Cleaner

**SCRATCH COAT**

**SEMCO LIQUID MEMBRANE™**

**SCRATCH COAT**

**SEMCO SATIN STONE**

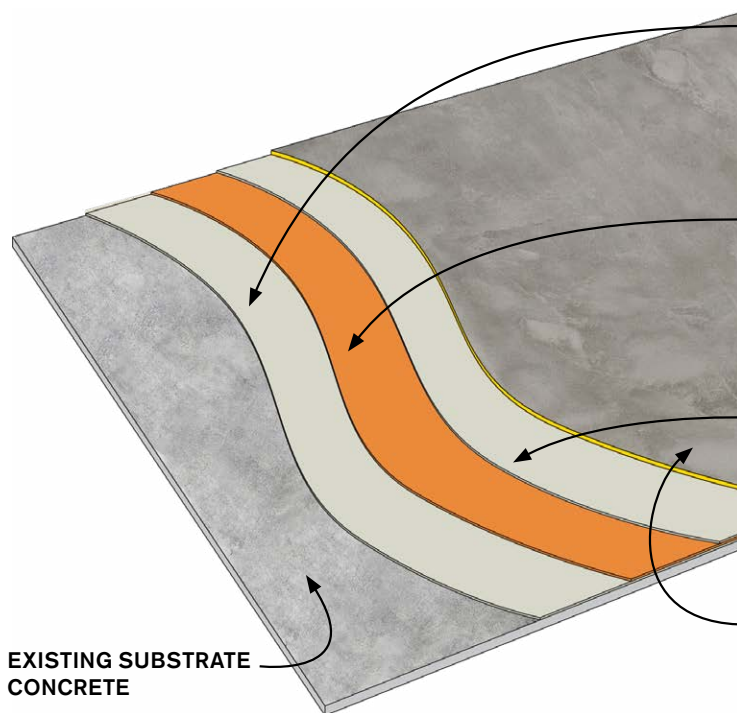

EXISTING SUBSTRATE  
CONCRETE

**LIMITATIONS:**

- Crack suppression properties will only function with cracks or fractures not exceeding 1/16" on standard 4" concrete
- Control Joints will need to be address with the SEMCO Crack and Control Detail:  
[https://semcosurfaces.com/files/SEMCO\\_crack-and-control-joint-detail.pdf](https://semcosurfaces.com/files/SEMCO_crack-and-control-joint-detail.pdf)
- Installation temperature between 45-95°F

**FLOORS | WALLS | POOL DECKS | WATERPROOFING**  
REDEFINING THE ART OF SURFACE CREATIVITY FOR OVER 25 YEARS USING GREEN MATERIALS

