


Technical Product Information

PRODUCT DESCRIPTION

Satin Stone is the latest technology in SEMCO Cross Linking sealers. It interlocks with applied substrates solidifying and creating total surface protection with a density enhancement of up to 85%. Excellent for interior and exterior use while handling rigorous surface conditions including high traffic commercial and industrial environments.

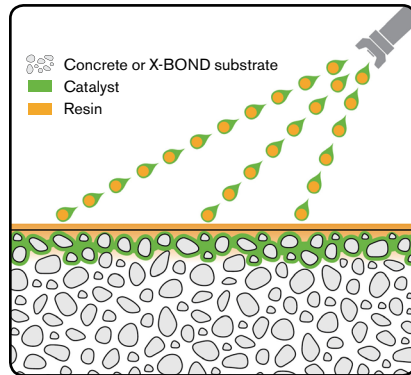


MIXING RATIO: 2 Parts A : 1 Part B




SATIN STONE
ASTM G154 ACCELERATED WEATHERING TEST:
2000 HOURS, NO CHANGE IN WEIGHT/DENSITY, NO DISCOLORATION



SATIN STONE
ASTM 5155 ABRASION RESISTANCE TEST:
0.019% CHANGE IN THICKNESS AFTER 10,000 RUBS

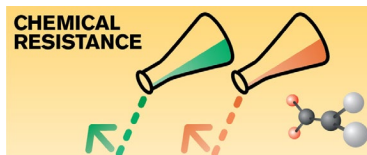

SATIN STONE
RESISTANT TO 10% ACETIC ACID, 10% HYDROGEN CHLORIDE,
AMMONIUM HYDROXIDE, GASOLINE, HYDRAULIC FLUID, BRAKE FLUID

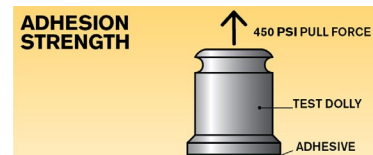

SATIN STONE
450 PSI PULL FORCE
ASTM 4541 PULL-OFF STRENGTH OF COATINGS TEST:
450 PSI, 180% OF ASTM REQUIRED 250 PSI

FEATURES / BENEFITS

- Withstands industrial and commercial vehicle traffic
- Rejuvenates color, leaves natural look
- For interior and exterior surfaces
- Resistant to chemicals: can be used in hospitals, laboratories, food preparation areas and automotive facilities

*Also available with a non-skid additive

*Available in color

APPLICATION AND SPECIFICATIONS

Application	Airless sprayer tip size 21 at 1,000 PSI
Application environment	Apply at temperatures from 50°F to 90°F
Drying time	1 hour at 72°F
Cure time	48 hours
Color	Part A - milky white, Part B - light amber
Chemical type	Polyurethane hybrid
Clean up	SEMCO Stone Soap with water
Shelf life	1 year
Useful life after mixing Part A with Part B	35 minutes after mixing
Packaging (base and color activator)	Part A - 1 gal. pail, Part B - 0.5 gal. pail

COVERAGE (sq. ft. per gallon of mixture)

Polished concrete	200-250
X-Bond Seamless Stone	250-300
Artificial stone	200-250
Stamped concrete	300-350
Below grade	N/A

TEST RESULTS*

Used automobile oil	Excellent
Transmission fluid	Good
Water	Excellent
Cooking oil	Excellent
Wine	Excellent
Alkali resistance	Excellent
Hydrochloric acid (10%)	Good



SUBSTRATES

- X-Bond Seamless Stone
- Pre-Stain Color
- Color Green
- New and existing concrete
- Stamped concrete
- Natural stone
- Industrial and commercial floors