



POOL RESURFACING DETAIL

Waterproof Seamless Stone over concrete

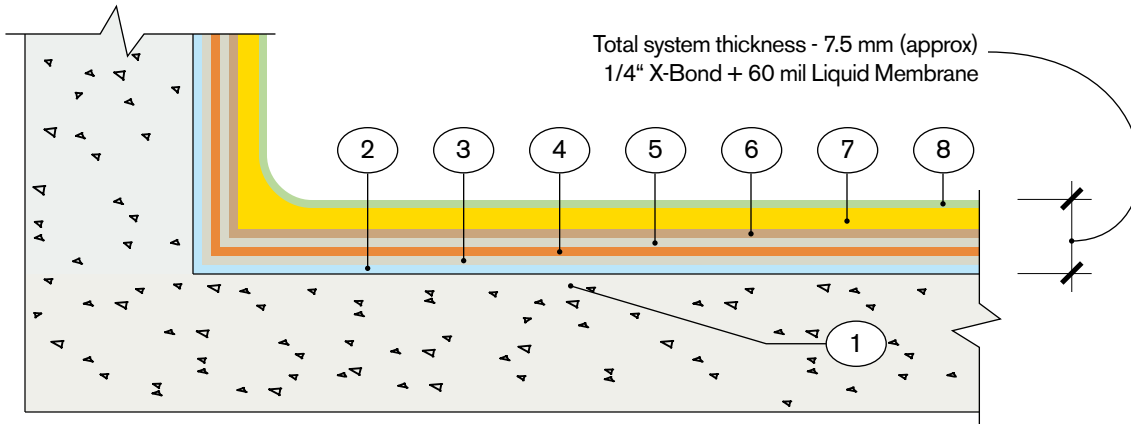

- 1. Existing substrate - concrete
- 2. Preparation Type C on substrate to balance pH level
- 3. Scratch Coat
- 4. Liquid Membrane - 4 coats, each coat 15 mil. Total thickness - 60 mil (4 coats). Let each coat dry before applying next coat.
- 5. Scratch Coat
- 6. OPTIONAL : Brown Coat
- 7. X-Bond Seamless Stone - apply in different layers to a total thickness of 1/4" (about 6 mm). X-Bond layers do not need to be dry before applying next coat.
- 8. X-Crete 500 - apply with HVLP, 4 even layers. Let each coat dry 1-2 hours. Apply in different direction each layer. Coverage (per 4 coats) - 175 sq ft / gal. Cure time - 5 days before filling pool with water.

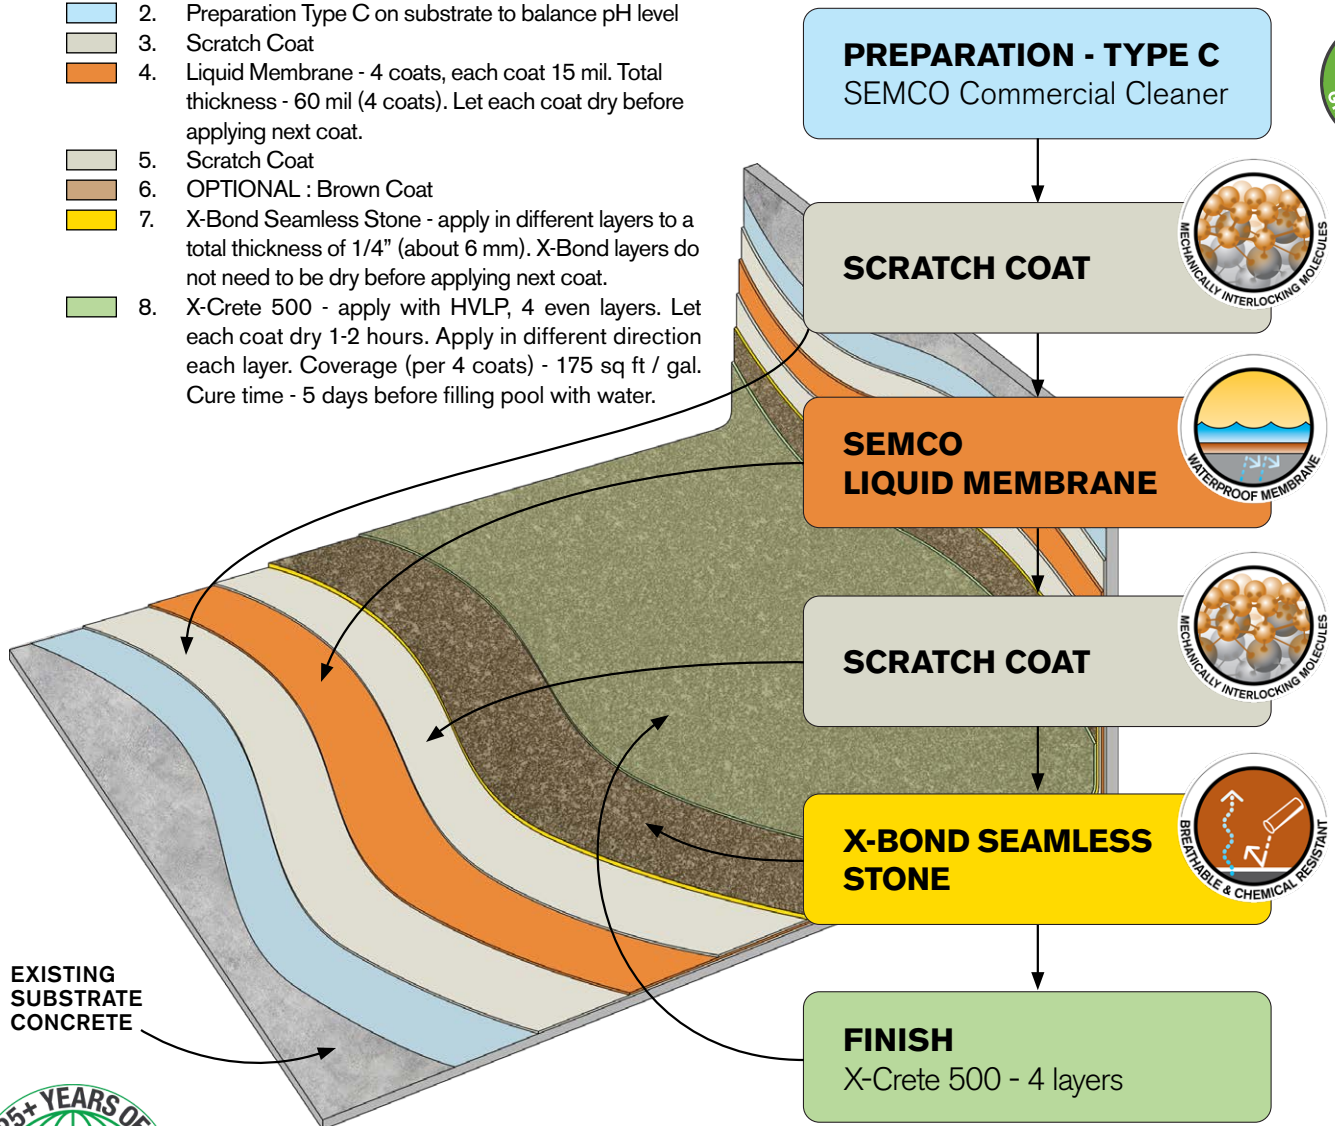

FLOORS | WALLS | POOL DECKS | WATERPROOFING
REDEFINING THE ART OF SURFACE CREATIVITY FOR OVER 25 YEARS USING GREEN MATERIALS

